



# Company

For 60 years PVR has been a leader providing high quality and reliable vacuum pumps. PVR means primarily trusted and advanced technologies, but also sustainable development for the stakeholders, environmental protection and focus on energy saving. The experience acquired during these years of activities, allows PVR to offer products and services that are always reliable and innovative.



sevencom.it




Provide trusted & advanced technologies



# Machining Division

With a view to verticalization of its processes and increased capacity to provide more services to customers, PVR has had a specialized Machining Division for brass, steel, cast iron, stainless steel, and aluminum components since 2023.

Professionalism, experience, and quality characterise PVR Machining Division in the machining of numerous parts for vacuum pumps and components in the industrial, automotive, petrochemical, hydraulic, and electrical sectors.

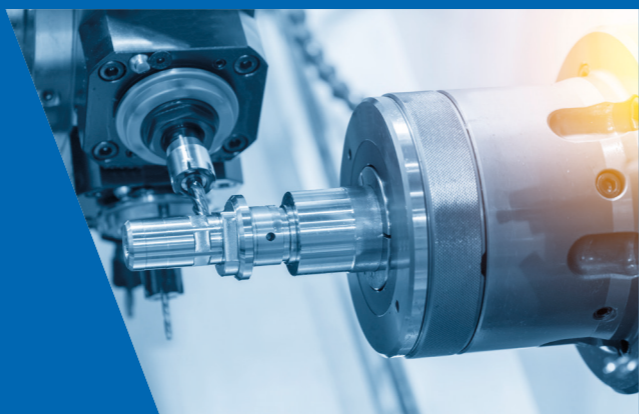

# DRY C - CR Dry claw vacuum pumps



# Service

PVR guarantees a qualified advice for every inquiry thanks to its skilled technical/sales office that supports every project. The Service Department assists and advises our customers with scheduled maintenance, qualified overhauls and spare parts ready for delivery.

**PVR Srl**

**HEADQUARTERS:**

Via Santa Vecchia, 107 - 23868 Valmadrera (LC), Italy

+39 0341 1918 51

sales@pvr.it

www.pvr.it

**SERVICE:**

+39 339 1495 976

service@pvr.it

**LOCAL UNIT:**

Via IV Novembre, 104F  
23868 Valmadrera (LC), Italy

**MACHINING DIVISION:**

Via Grandi, 12 Loc. Malpensata  
26866 Sant'Angelo Lodigiano (LO), Italy



www.pvr.it


042401-EN



# DRY C - CR Series

## Dry claw vacuum pumps

DRY C series have been designed for those applications where the handled medium must remain contaminant free during the process. The absence of wear parts in these pumps offer considerable savings in maintenance and associated downtime.

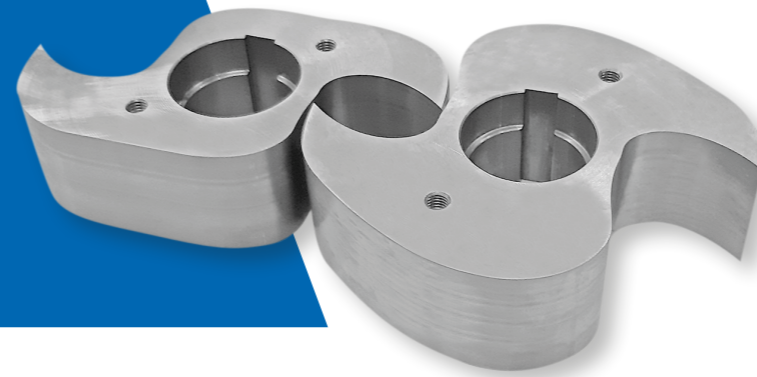

### Applications

Bottle fillings  
Milk production  
Evisceration systems  
Pneumatic conveying plants  
Granule conveying systems  
Plastic extruders

Pick & place systems  
Hospital central vacuum  
Ozone generators  
CNC routers

Glass, ceramic and pottery industry  
Water and soil remediation  
Printing machines  
Central vacuum systems

### Optional and accessories

Suction filter  
Vacuum regulating valve  
Safety valve  
Silencer



DRY C 300




Also available in  
VFD version  
Variable  
Frequency Drive





			DRY C 100	DRY C 157	DRY C 250	DRY C 300
Nominal pumping speed	m <sup>3</sup> /h	50 Hz	100	150	235	300
		60 Hz	120	180	282	360
Ultimate pressure (abs.)	mbar	50 Hz	-	50	-	-
		60 Hz	-	50	-	-
Continuous ultimate pressure (abs.)	mbar	50 Hz	150	70	200	200
		60 Hz	150	70	200	200
Noise level	dB(A)	50 Hz	76	73	78	78
		60 Hz	78	75	80	80
Motor power	kW	50 Hz ~ 3	2,2	3	4	5,5
		60 Hz ~ 3	3	4	5,5	7,5
Motor speed	rpm	50 Hz	3000	3000	3000	3000
		60 Hz	3600	3600	3600	3600
Dimensions	L x B x H mm	50 Hz	703x356x390	797x434x524	841x540x530	892x540x530
		60 Hz	703x356x390	822x434x524	878x540x530	912x540x530
Total weight	kg	50 Hz ~ 3	90	120	181	215
		60 Hz ~ 3	90	124	200	219

DRY CR 60	DRY CR 150	DRY CR 400	DRY CR 500	DRY CR 1000
60	150	400	500	950
72	180	480	600	1140
50	50	50	50	50
100	100	200	200	200
-	-	-	-	-
-	-	-	-	-
1,1	3	7,5	9,2	18,5
1,5	4	9,2	11	22
2850	2850	2850	2850	2850
3450	3450	3450	3450	3450
736x321x461	797x434x524	1065x586x695	1120x586x695	1409x737x1037
736x321x461	822x434x524	1105x586x695	1291x586x695	1475x737x1037
55	131	350	450	720
60	137	355	455	730

DRY C 157

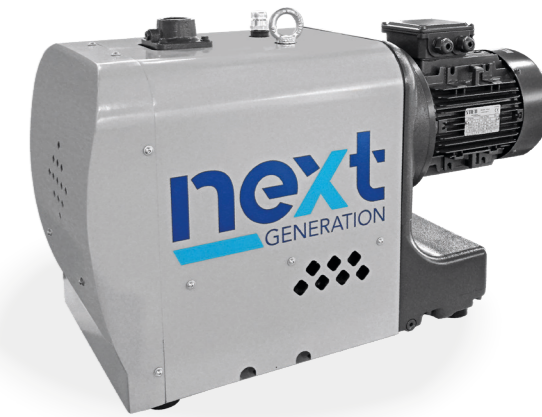

## Dry claw technology

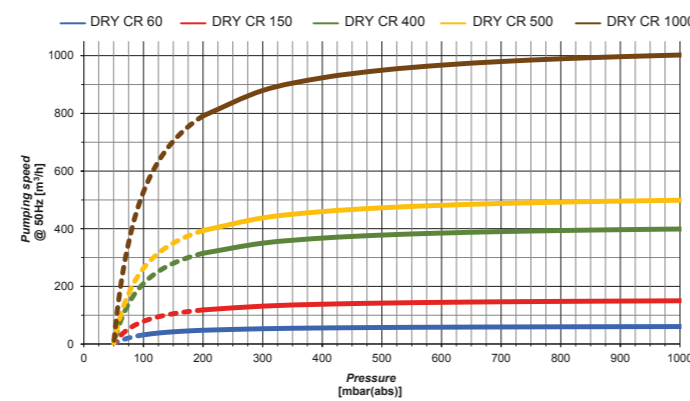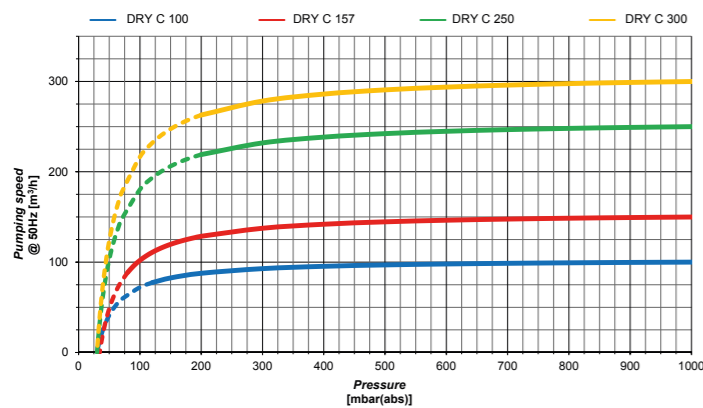

## HCT version

The HCT version of the DRY C series pumps consists of a surface treatment of the rotors to increase the resistance to water vapour and corrosion. The special treatment and the absence of wear parts allow considerable savings in terms of both maintenance and machine downtime.



Scan to find out more

